



LED490-series



TECHNICAL DATA

Visible LED

InGaN

LED490-series are InGaN LEDs mounted on a lead frame and encapsulated in various types of epoxy lens, which offers different design settings.

On forward bias, it emits a band of visible light at a peak wavelength of 490 nm.

Specifications

- Structure: InGaN
- Peak Wavelength: typ. 490 nm
- Optical Output Power: typ. 12 mW
- Resin Material: Epoxy resin
- Solder: Lead free



Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

Type	Symbol	Value	Unit
Power Dissipation	P_D	200	mW
Forward Current	I_F	50	mA
Reverse Voltage	V_R	5	V
Operating Temperature	T_{OP}	-40 ... +85	$^\circ\text{C}$
Storage Temperature	T_{STG}	-40 ... +100	$^\circ\text{C}$
Soldering Temperature (for 5 sec.)	T_{SOL}	265	$^\circ\text{C}$

Electro-Optical Characteristics ($T_a=25^\circ\text{C}$)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F = 20 \text{ mA}$	-	3.3	4.0	V
Reverse Current	I_R	$V_R = 5 \text{ V}$	-	-	10	μA
Radiated Power	P_O	$I_F = 20 \text{ mA}$	-	12	-	mW
Peak Wavelength	λ_P	$I_F = 20 \text{ mA}$	480	490	500	nm
Half Width	$\Delta\lambda$	$I_F = 20 \text{ mA}$	-	30	-	nm



Type	Viewing Half Angle	Outer Dimension	Dimension Figure
LED490-01	±9°	Ø 5	1
LED490-02	±4°	Ø 5	2
LED490-03	±12°	Ø 5	3
LED490-04	±20°	Ø 5	4
LED490-05	±30°	Ø 5	5
LED490-06	±7°	Ø 5	6
LED490-09	±18° (long)	Ø 5	7
	±14° (short)	Oval	
LED490-31		Ø 3	8
LED490-33	±16°	Ø 3	9
LED490-34		Ø 3	10
LED490-36	±32°	Ø 3	11
LED490-41		Ø 4	12
LED490-42		Ø 4	13

* Brightness is measured by Tektronix J-16

* Total Radiated Power is measured by Photodyne #500

The above specifications are for reference purpose only and subjected to change without prior notice.

Precaution for Use

1. Cautions


- DO NOT look directly into the emitted light or look through the optical system. To prevent in adequate exposure of the radiation, wear protective glasses.

2. Lead Forming

- When forming leads, the leads should be bent at a point at least 3 mm from the base of the lead. DO NOT use the base of the leadframe as a fulcrum during lead forming.
- Lead forming should be done before soldering.
- DO NOT apply any bending stress to the base of the lead. The stress to the base may damage the LED's characteristics or it may break the LEDs.
- When mounted the LEDs onto the printed circuit board, the holes on the circuit board should be exactly aligned with the leads of LEDs. If the LEDs are mounted with stress at the leads, it causes deterioration of the lead and it will degrade the LEDs.




Recommended Land Layout (Unit: mm)

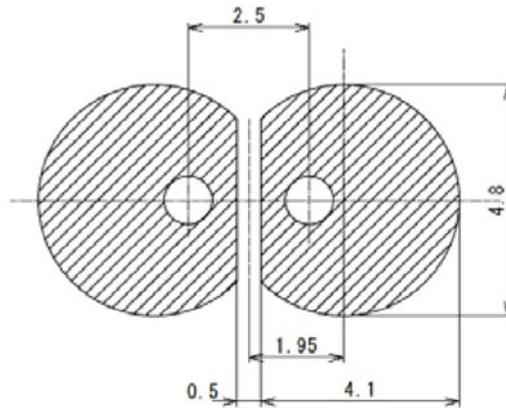

3. Soldering Conditions

- Solder the LEDs no closer than 3 mm from the base of the lead.
- DO NOT apply any stress to the lead particularly when heat.
- The LEDs must not be reposition after soldering.
- After soldering the LEDs, the lead should be protected from mechanical shock or vibration until the LEDs return to room temperature.
- When it is necessary to clamp the LEDs to prevent soldering failure, it is important to minimize the mechanical stress on the LEDs.
- Cut the LED leads at room temperature. Cutting the leads at high temperature may cause the failure of the LEDs.

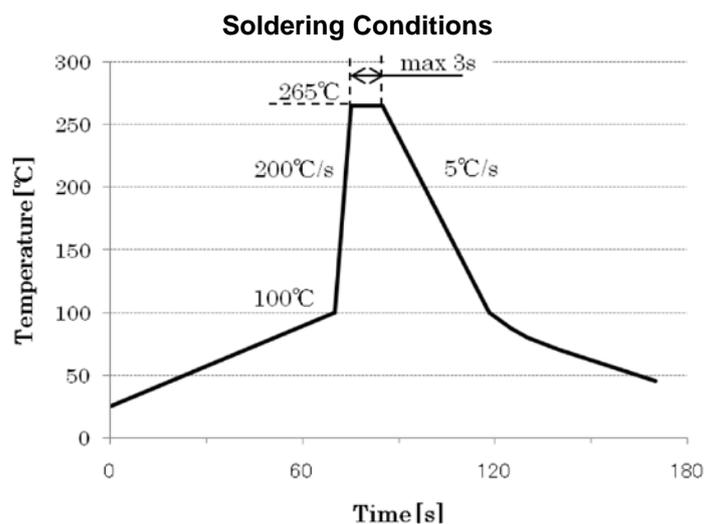

4. Static Electricity

- The LEDs are very sensitive to Static Electricity and surge voltage. So it is recommended that a wrist band or an anti-electrostatic glove be used when handling the LEDs.
- All devices, equipment and machinery must be grounded properly. It is recommended that precautions should be taken against surge voltage to the equipment that mounts the LEDs.