



## RLE650-8-5-30



### TECHNICAL DATA

## Beam Expander Diode Laser Module


Red beam expander diode laser module at 650 nm, featuring low divergence collimated beam and long lifetime.

### Electro-Optical Characteristics

Item	Value
Wavelength	650 nm
Output Power	8 mW
Operating Mode	CW
Optics	Glass lens, both sides AR coated
Beam Character	Roundish, but brightness not uniform
Elliptic Proportion	1:1
Divergence	0.2-0.4 mrad
Beam	fixed focus (collimated)
Output Aperture	Ø30 mm
Operating Distance, Standard	50 m
Operating Voltage	DC 5 V
Operating Current	≤120 mA
Dimension	Ø43 x 140 mm
Wire Length	200 mm
Operating Temperature	-10 ... +40 °C
Storage Temperature	-40 ... +80 °C
Expected Life Time	≥8000 hours

**Note:** The above specifications are for reference purpose only and subjected to change without prior notice.

### Package Dimensions

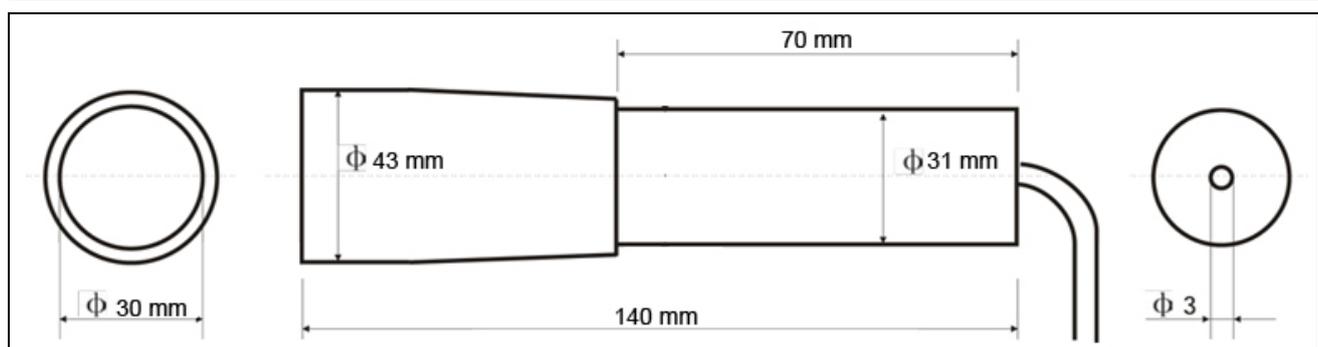



## Connector Plug



## Precaution for Use

### 1. Safety of Laser light

- DO NOT look directly into the emitting area of the laser during operation!
- Laser Light can damage the human eyes and skin. Do not expose the eye or skin directly to any laser light and/or through optical lens. When handling the laser module, wear appropriate safety glasses to prevent laser light, even any reflections from entering to the eye. Focused laser beam through optical instruments will increase the chance of eye hazard.



### 2. Static Electricity

- Static electricity or electrical surges will reduce and degrade the reliability of the laser module. So it is recommended that a wrist band and/or an anti-electrostatic glove be used when handling the product.
- All devices, equipment and machinery must be grounded properly. It is recommended that precautions should be taken against surge voltage to the equipment that mounts the laser module.



### 3. Absolute Maximum Rating

- Active layer of LDs shall have high current density and generate high electric field during its operation. In order to prevent excessive damage, the LD must be operated strictly below absolute maximum rating. The operating current should be decided after considering the ambient maximum temperature of LEDs.



### NOTE

LASER MODULE  
MUST BE COOLED