



# ROITHNER LASERTECHNIK GmbH

WIEDNER HAUPTSTRASSE 76  
TEL. +43 1 586 52 43 -O, FAX. -44

1040 VIENNA AUSTRIA  
OFFICE@ROITHNER-LASER.COM



## DUVxxx-SD353EN

- Deep Ultraviolet Light Emission Source
- 265 - 340 nm
- ESD protection
- SiO<sub>2</sub> lens
- Beam angle 35 deg.



### Description

**DUVxxx-SD353EN** is a series of **AlGaIn** based single emitter **DEEP-UV LEDs** in a 3535 SMD package, is ready for reflow soldering process, and can be delivered on reel. It features an integrated ESD protection device and quartz glass window.

### Electro-Optical Characteristics $I_F=350\text{mA}$ ( $T_{\text{CASE}} = 25^\circ\text{C}$ )

Parameter	Symbol	DUV265-SD353EN	DUV275-SD353EN	DUV280-SD353EN	DUV295-SD353EN	Unit
Peak Wavelength	$\lambda_P$	265 $\pm$ 5	275 $\pm$ 5	280 $\pm$ 5	295 $\pm$ 5	nm
Radiated Power	$P_O$	25	33	33	33	mW
Spectral Width (FWHM)	$\Delta\lambda$	11	11	11	11	nm
Forward Voltage	$V_F$	6.0	6.0	6.0	6.0	V
Viewing Angle	$2\Theta_{1/2}$	35				deg.

Parameter	Symbol	DUV308-SD353EN	DUV325-SD353EN	DUV340-SD353EN	/	Unit
Peak Wavelength*	$\lambda_P$	308 $\pm$ 5	325 $\pm$ 5	340 $\pm$ 5	/	nm
Radiated Power**	$P_O$	50	40	60	/	mW
Spectral Width (FWHM)	$\Delta\lambda$	12	12	9	/	nm
Forward Voltage	$V_F$	5.6	5.0	5.0	/	V
Viewing Angle	$2\Theta_{1/2}$	35				deg.

\*Peak Wavelength measurement tolerance is  $\pm 3\text{nm}$

\*\*Radiated power measurement tolerance is  $\pm 10\%$

	<b>CAUTION</b>
	<ul style="list-style-type: none"> <li>• LEDs emit very strong UV radiation.</li> <li>• Don't look directly into the LED light. UV radiation can harm your eyes.</li> <li>• To prevent even inadequate exposure, wear protective eyewear.</li> <li>• If LEDs are embedded in devices, please indicate warning labels against the UV light LED used.</li> <li>• Keep out of reach of children.</li> <li>• Specification and dimension are subject to change for improvement without notice.</li> </ul>




## Performance Characteristics

Please refer to the respective **DUVxxx-353E** datasheet for detailed performance characteristics

## Outline Dimensions

### SMD 3535

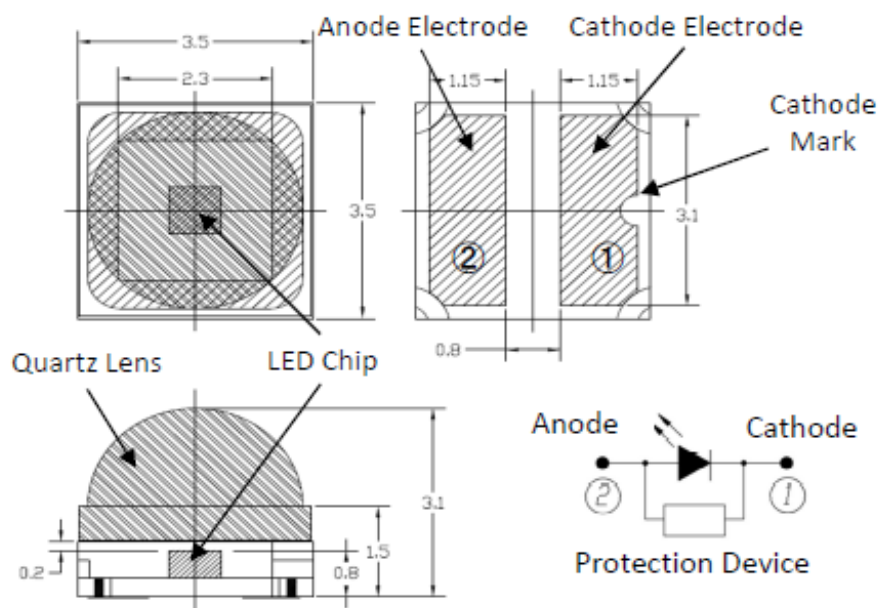

all dimensions in mm

## Accessories

### SD35-PCB

A printed **Cu circuit board** with Ni finish and **Au contact plates**, designed for easily soldering and mounting the SD35 series LEDs. Ideally suited for **prototyping and evaluation**







## Precautions

### Soldering

#### Reflow soldering profile

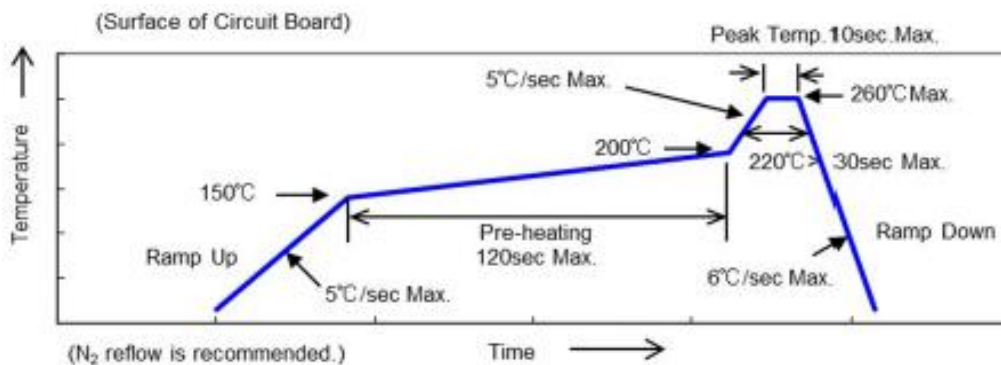

#### Recommended solder pad



all dimensions in mm

### Static Electricity

**LEDs are sensitive to electrostatic discharge (ESD).** Precautions against ESD must be taken when handling or operating these LEDs. Surge voltage or electrostatic discharge can result in complete failure of the device.



### UV-Radiation

During operation these LEDs do emit **high intensity ultraviolet light**, which is hazardous to skin and eyes, and may cause cancer. Do avoid exposure to the emitted UV light. **Protective glasses are recommended.** It is further advised to attach a warning label on products/systems that do utilize UV-LEDs:

### Static Electricity

**Do only operate LEDs with a current source.**



Running these LEDs from a voltage source *will* result in complete failure of the device.

Current of a LED is an exponential function of the voltage across it. Usage of current regulated drive circuits is mandatory