



## LED780-66-16100

- Infrared High Power LED Array
- 780 nm, 2.8 W
- Chip: 1x1 mm, 16 pcs., AlGaAs
- TO-66 package, Silicone and/or Epoxy resin
- Viewing Angle: 126°



### Description



**LED780-66-16100** is composed by 16 pcs. of 1 x 1 mm<sup>2</sup> high current driven AlGaAs chip dies, mounted on a metal stem TO-66 and covered with epoxy resin or silicon resin.

It is designed for wide viewing and extremely high output power illuminator.

On forward bias, it emits a power radiation of typical **2.8 W** at a peak wavelength at **780 nm**.

### Maximum Ratings (T<sub>CASE</sub>=25°C)

Parameter	Symbol	Values		Unit
		Min.	Max.	
Power Dissipation	$P_D$		26	W
Forward Current	$I_F$		3200	mA
Reverse Voltage	$V_F$		20	V
Operating Temperature	$T_{CASE}$	- 40	+ 85	°C
Storage Temperature	$T_{STG}$	- 40	+ 100	°C
Lead Solder Temperature *	$T_{SLD}$		+ 265	°C

\* must be completed within 3 seconds







### Electro-Optical Characteristics (T<sub>CASE</sub>=25°C)


Parameter	Symbol	Conditions	Values			Unit
			Min.	Typ.	Max.	
Peak Wavelength	$\lambda_P$	$I_F=3.2A$		780		nm
Half Width	$\Delta\lambda$	$I_F=3.2A$		30		nm
Forward Voltage	$V_F$	$I_F=3.2A$		8.0		V
Radiated Power *	$P_O$	$I_F=3.2A$		2.8		W
Viewing Angle	$\varphi$	$I_F=3.2A$		126		deg.

\* measured by S3584-08



## Typical Performance Curves

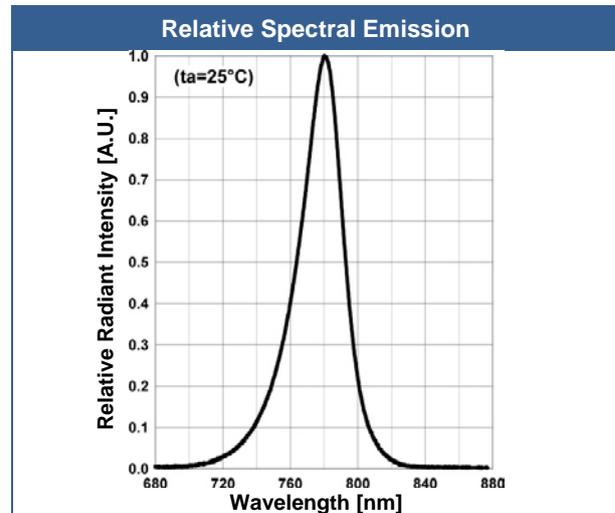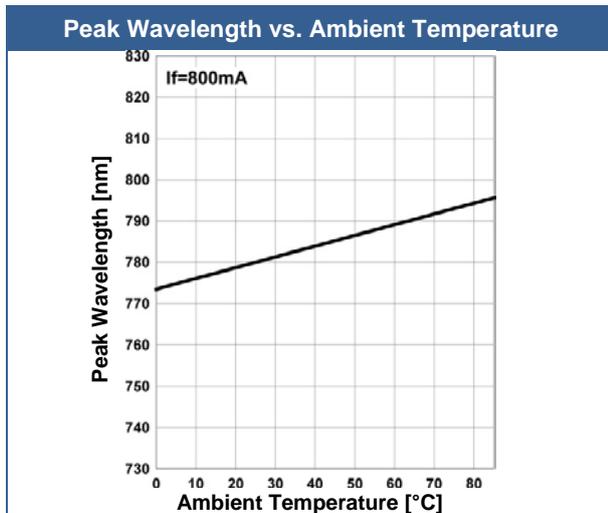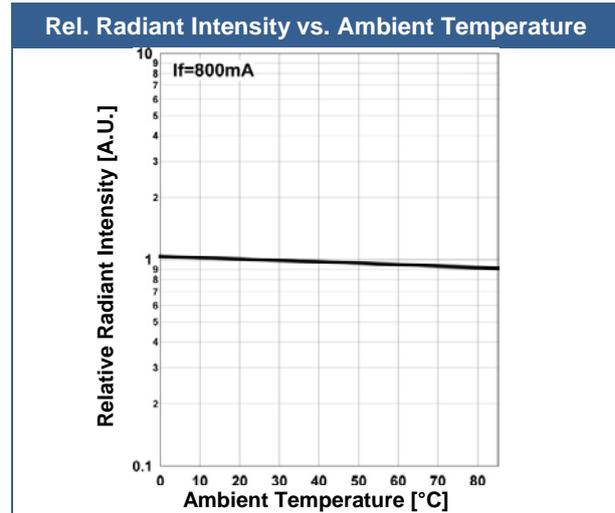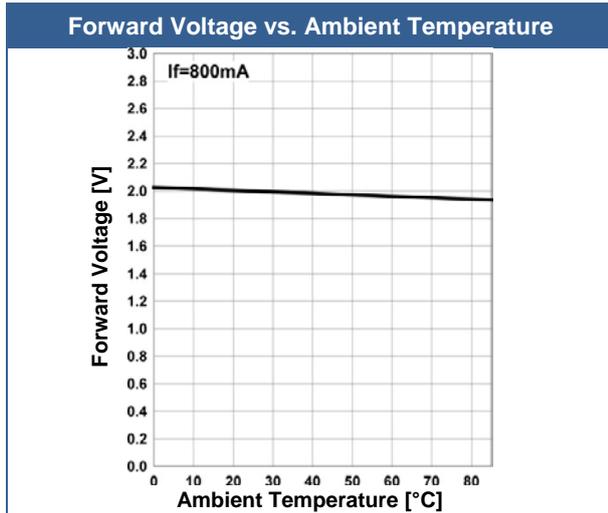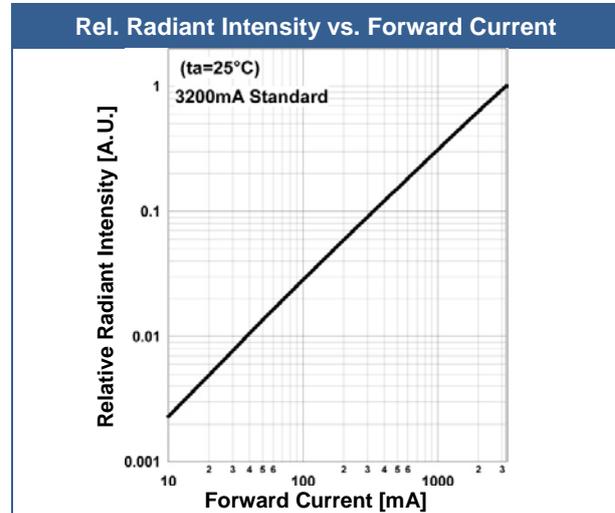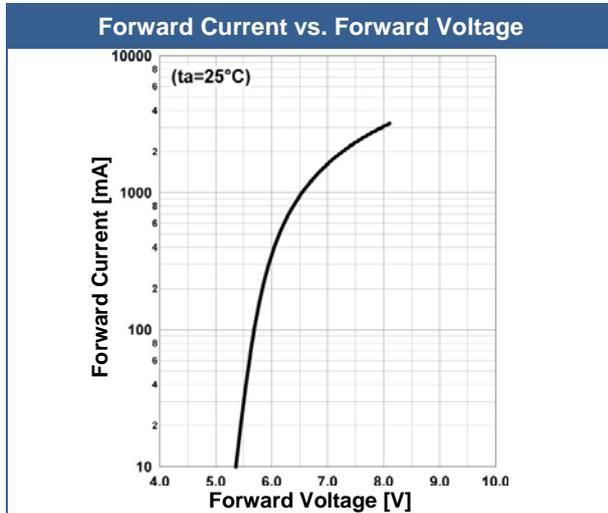


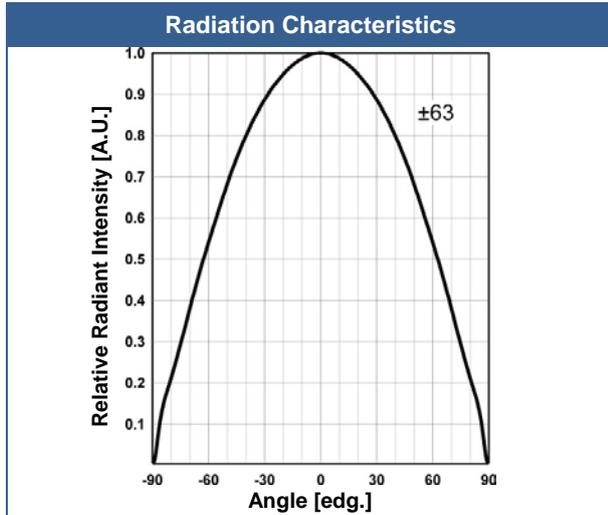

## Outline Dimensions

LED780-66-16100

TO-66

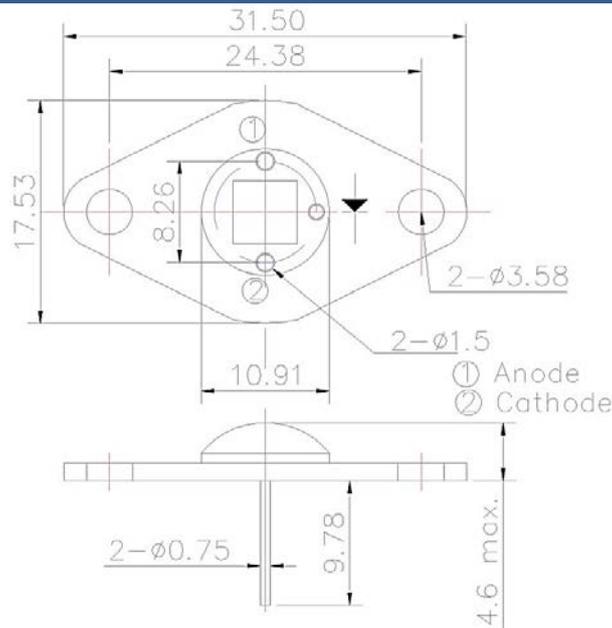

All Dimensions in mm



## Precautions

---

### Cautions:

- This high power LED must be cooled!
- NOT look directly into the emitting area of the LED during operation!

### Soldering:

- Do avoid overheating of the LED
- Do avoid electrostatic discharge (ESD)
- Do avoid mechanical stress, shock, and vibration
- Do only use non-corrosive flux
- Do not apply current to the LED until it has cooled down to room temperature after soldering

### Cleaning:

**Cleaning with isopropyl alcohol, propanol, or ethyl alcohol is recommended**

DO NOT USE acetone, chloroform, trichloroethylene, or MKS

DO NOT USE ultrasonic cleaners

### Static Electricity:

**LEDs are sensitive to electrostatic discharge (ESD).** Precautions against ESD must be taken when handling or operating these LEDs. Surge voltage or electrostatic discharge can result in complete failure of the device.

### Radiation:

During operation these LEDs do emit **high intensity light**, which is hazardous to skin and eyes, and may cause cancer. Do avoid exposure to the emitted light. **Protective glasses are recommended.** It is further advised to attach a warning label on products/systems.

### Operation:

**Do only operate LEDs with a current source.**

Running these LEDs from a voltage source will result in complete failure of the device.

Current of a LED is an exponential function of the voltage across it. Usage of current regulated drive circuits is mandatory.