

power light source

Luxeon Flash

Introduction

Luxeon® Flash is a family of ultra-compact light sources specifically designed and tested for use as a camera flash in space-constrained, portable digital imaging applications. The Luxeon Flash products are based on proven Luxeon technology and provide the highest levels of light output available for a solid state light source. The uniquely bright source density characteristics of the Luxeon Flash products will provide greater amounts of light where needed, enabling higher resolution pictures to be taken in lower level ambient light environments at greater distances. Camera cell phones, digital still cameras and PDAs can all incorporate Luxeon Flash into sleek designs while maintaining high levels of light output.

Features


- ♦ Highest brightness LED flash
- ♦ Very small emitter size
- ♦ Radiation patterns optimal for Camera Flash (with lens)
- ♦ Smaller than Xenon Strobe Light
- ♦ Surface mount technology
- ♦ Superior ESD protection

Benefits

- ♦ Intense illumination and long distance (up to 2m)
- ♦ Enables higher resolution pictures in darker environments
- ♦ Small emitter size allows for smaller overall package size




Typical Applications

- ♦ Camera-phones
- ♦ Digital still cameras
- ♦ PDAs

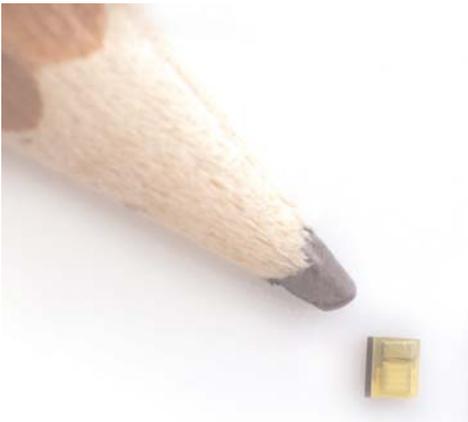

Mechanical Dimensions

LXCL-PWF1

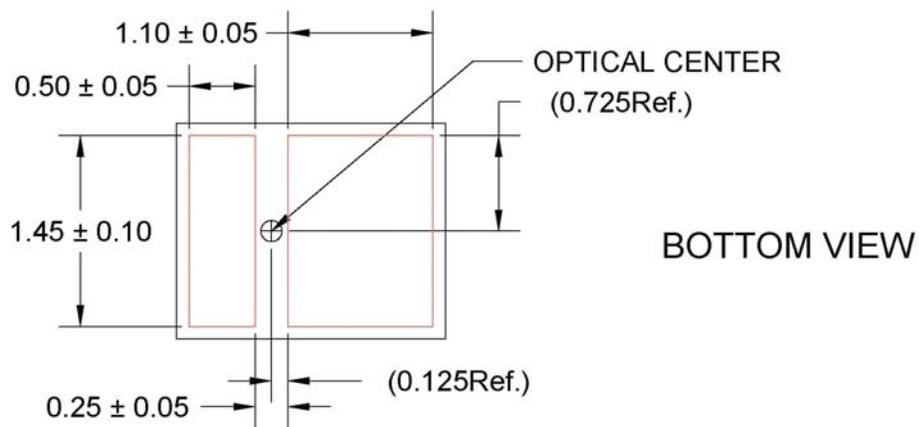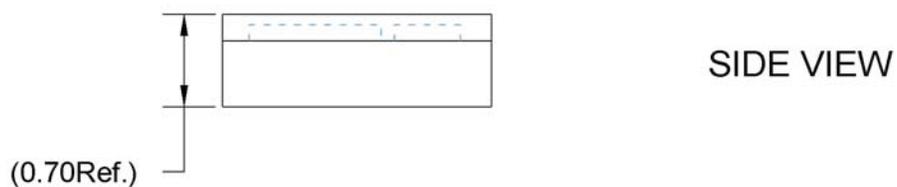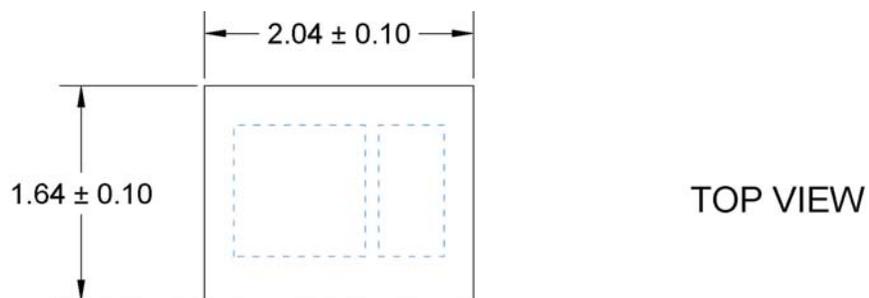

Notes:

1. Drawings not to scale.
2. All dimensions are in millimeters.
3. Measurements without tolerances are for reference only .

Flux Characteristics at 1000mA^{[1] [2]}, Junction Temperature, T_J = 25°C

Table 1.

Part Number	Current (mA)	Minimum Luminous Flux (lm)	Typical Luminous Flux (lm)
		Φ_V	Φ_V
LXCL-PWF1	1000	36	53

Electrical Characteristics at 1000mA^[3], Junction Temperature, T_J = 25°C

Table 2.

Part Number	Current (mA)	Forward Voltage V _F (V)		
		Min.	Typ.	Max.
LXCL-PWF1	1000	3.2	3.8	4.8

Typical Flux (lm) Output vs. Drive Current^{[4] [5]}

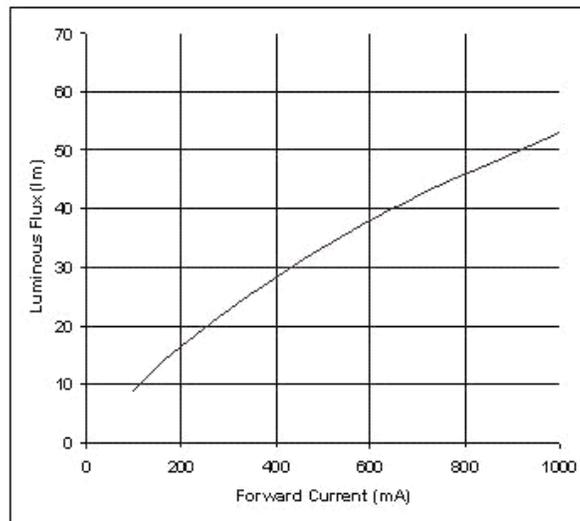


Figure 1.

Notes for Tables 1 and 2 and Figure 1:

1. Minimum luminous flux performance guaranteed within published operating conditions. Lumileds maintains a tolerance of $\pm 10\%$ on flux measurements.
2. Luxeon types with even higher luminous flux levels will become available in the future. Please consult your Lumileds Authorized Distributor or Lumileds sales representative for more information.
3. Lumileds maintains a tolerance of $\pm 0.06V$ on forward voltage measurements.
4. All values assume a junction temperature T_J of 25°C.
5. For flash modes, it is recommended that the drive current be as high as possible (up to 1000 mA) for optimal results.

Flash and Torch Mode Operation

Typical Axial Intensity (cd) and Illuminance (lux) vs. Drive Current, $T_J = 25^\circ\text{C}$

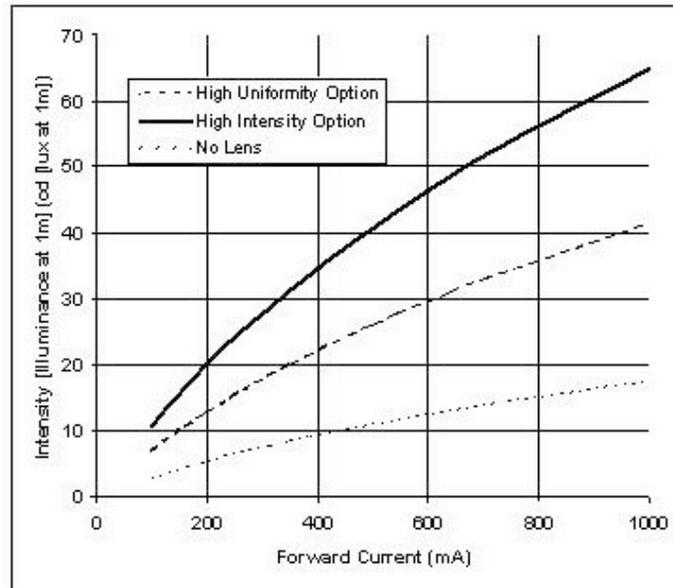


Figure 2.

Notes for Figure 2:

1. High Uniformity and High Intensity Options assume use of the Lumileds reference design optic. The design of this optic is available upon request.

High Uniformity option is achieved by placing the lens at 0.4 mm from the top of the emitter. This will yield uniformity of 41% (relative to the center) at the horizontal edge and 24% (relative to the center) at the corners.

Uniformity can be traded-off for increased On-Axis Illuminance/Intensity. This is shown in the High Intensity Option and is achieved by placing the optic at 0.7mm from the top of the emitter. In this option, the uniformity is 17% at the horizontal edge and 10% at the corners.

2. Illuminance is inversely proportional to the square of the distance.

For example: if the illuminance at 1 meter is 40, then the illuminance at 2 meters is $40/(2^2) = 10$ lux.

The illuminance at 3 meters is $40/(3^2) = 4.4$ lux

3. For flash modes, it is recommended that the drive current be as high as possible for optimal results.

Color Temperature (White) for Flash & Torch Modes

Table 3.

Color Temperature - CCT			Total Included Angle ^[1] (degrees) $\theta_{0.90V}$	Viewing Angle ^[2] (degrees) $2\theta_{1/2}$
Min	Typ	Max		
5000K	7000K	10000K	140	120

Notes for Table 3:

1. Total included angle at which 90% of total luminous flux is captured.
2. $\theta_{1/2}$ is the off axis angle from lamp centerline where the luminous intensity is $1/2$ of the peak value.

Typical Forward Voltage (V_F) vs. Drive Currents (I_F) for Both Flash & Torch Modes Junction Temperature $T_J = 25^\circ\text{C}$

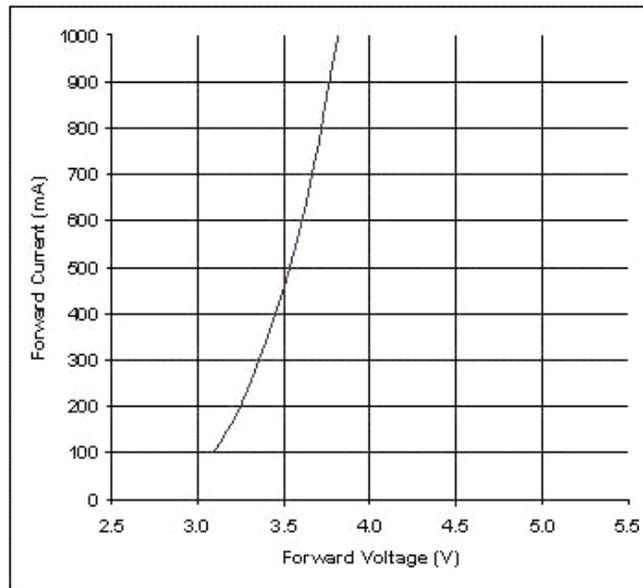


Figure 3. Forward Voltage vs. Drive Current for LXCL-PWF1.

Typical Electrical & Thermal Characteristics

Table 4.

Part Number	Dynamic Resistance ^{[1] [2]} (Ω) R_D	Temperature Coefficient of Forward Voltage ^[2] (mV/ $^\circ\text{C}$) $\Delta V_F / \Delta T_J$	Thermal Resistance, Junction to Case ($^\circ\text{C}/\text{W}$) $R_{\theta_{J-C}}$
LXCL-PWF1	0.7	-2.0	9.3

Notes for Table 4:

1. Dynamic resistance is the inverse of the slope in linear forward voltage model for LEDs.
2. Measured between $25^\circ\text{C} \leq T_J \leq 110^\circ\text{C}$ at $I_F = 350\text{mA}$.

Absolute Maximum Ratings LXCL-PWF1

Table 5.

Parameter	Value
Max DC Operating Current (mA)	350
Peak Pulsed Forward Current (mA)	1000
ESD Sensitivity ⁽¹⁾	JEDEC Class 3b (8kV)
LED Junction Temperature (°C)	135
Storage Temperature (°C)	-40 to +120
Reflow Soldering Temperature (°C)	260 for 5 seconds max
Operating Temperature (°C)	-40 to +85

Notes for Table 5:

- LEDs are not designed to be driven in reverse bias. Lumileds does not guarantee at reverse bias conditions.

Typical Wavelength Characteristics, $T_J = 25^\circ\text{C}$

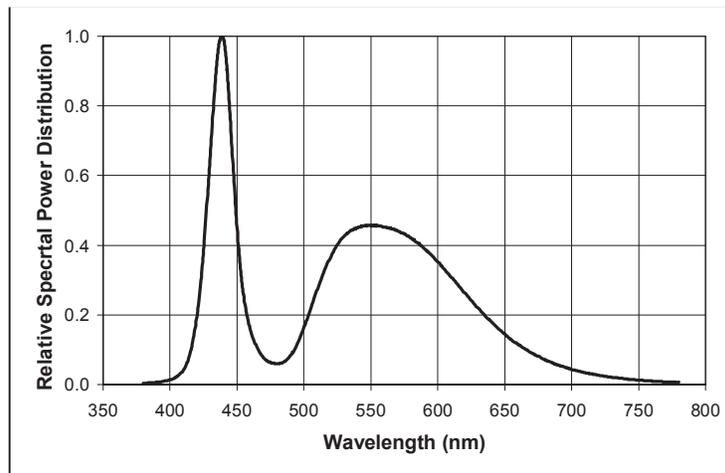


Figure 4. White Color Spectrum of Typical CCT Part, Integrated Measurement.

Typical Representative Spatial Radiation Pattern

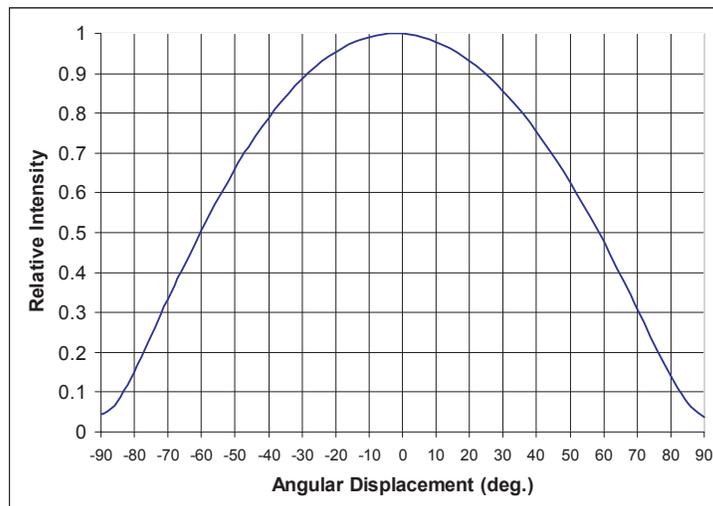


Figure 5. Typical Representative Spatial Radiation Pattern (Far Field) for LXCL-PWF1.

Reel Packaging (LXCL-PWF1)

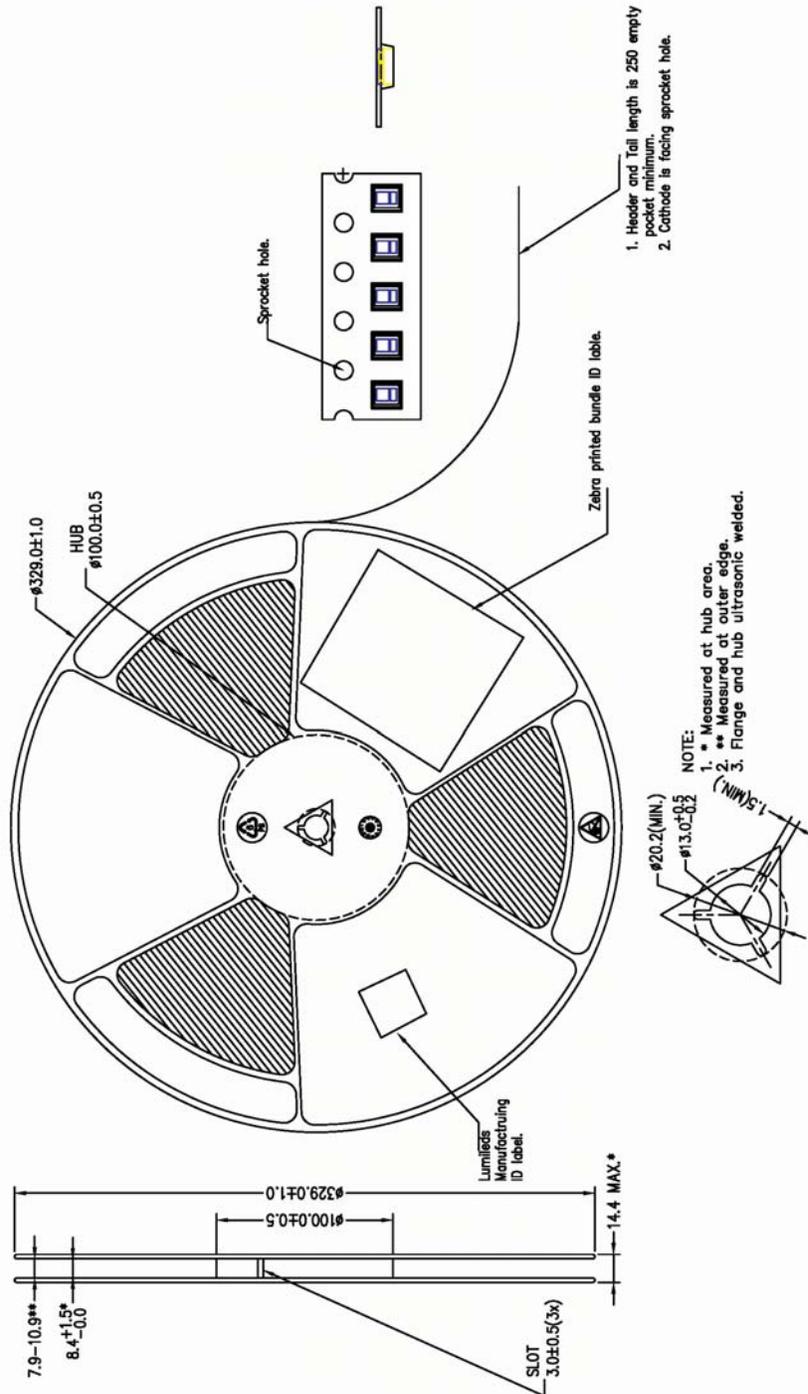


Figure 6. Reel dimensions and orientation.

Notes for Figure 6:

1. Drawings not to scale.
2. All dimensions are in millimeters.
3. All dimensions without tolerances are for reference only.

Emitter Packaging (LXCL-PWF1)

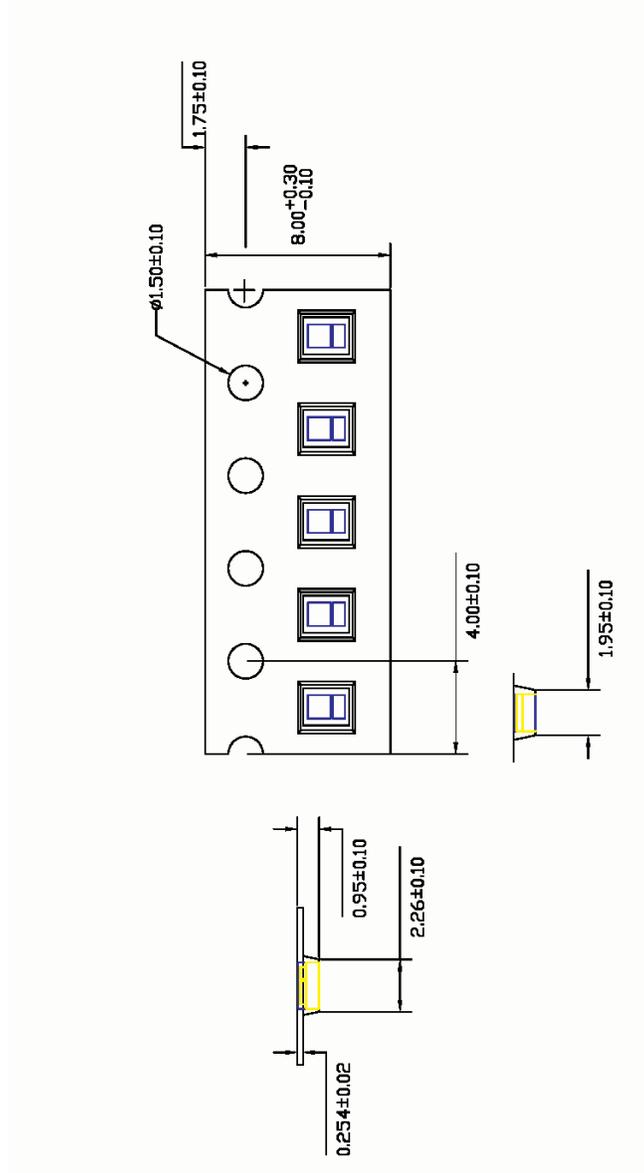


Figure 7. Tape Dimensions.

Notes for Figure 7:

1. Drawings not to scale.
2. All dimensions are in millimeters.
3. All dimensions without tolerances are for reference only.

Company Information

Luxeon is developed, manufactured and marketed by Lumileds Lighting, U.S., LLC. Lumileds is a world-class supplier of Light Emitting Diodes (LEDs) producing billions of LEDs annually. Lumileds is a fully integrated supplier, producing core LED material in all three base colors (Red, Green, Blue) and White. Lumileds has R&D development centers in San Jose, California and Best, The Netherlands and production capabilities in San Jose, California and Malaysia. Lumileds Lighting is a joint venture of Agilent Technologies and Philips Lighting and was founded in 1999. Lumileds is pioneering the high-flux LED technology and bridging the gap between solid-state LED technology and the lighting world. Lumileds is absolutely dedicated to bringing the best and brightest LED technology to enable new applications and markets in the Lighting world.

Lumileds may make process or materials changes affecting the performance or other characteristics of our products. These products supplied after such changes will continue to meet published specifications, but may not be identical to products supplied as samples or under prior orders.



WWW.LUXEON.COM
WWW.LUMILEDSFUTURE.COM

FOR TECHNICAL ASSISTANCE OR THE
LOCATION OF YOUR NEAREST SALES
OFFICE CONTACT ANY OF THE
FOLLOWING:

NORTH AMERICA:
+1 888 589 3662 OR
ASKLUXEON@FUTUREELECTRONICS.COM

EUROPE:
OO 800 443 88 873 OR
LUXEON.EUROPE@FUTUREELECTRONICS.COM

ASIA:
800 5864 5337 OR
LUMILEDS.ASIA@FUTUREELECTRONICS.COM