



## RLTMDL-975 1-2000 mW



### Infrared Laser Diode Modul

Infrared diode laser module at 975nm featuring compact size, long lifetime, low cost, and easy operatability, which is widely used for scientific experiments, measurements, optical sensors, communication, spectrum analysis, medical treatment, etc.



Specifications	
Wavelength	975 ±5 nm
Output Power	1 – 2000 mW
Transverse Mode	Near TEM <sub>00</sub>
Operating Mode	CW
Power Stability (rms, over 4 hours)	< 1%, < 3%, < 5%
Warm-up time	< 5 min
M <sup>2</sup> factor	< 20
Beam Divergence (full angle)	< 3.0 mrad
Beam Diameter (at the aperature)	~ 5 x 8 mm
Beam Height (from base plate)	24.8 mm
Polarization ratio	> 50:1
Pointing stability after warm up	< 0.05
Operating Temperature	10 - 35 °C
<b>Power Supply (90-260VAC)</b>	<b>PSU-FDA (included)</b>
Expected Lifetime	10000 hours
<b>Warranty period</b>	<b>1 year</b>

Options	
PSU-LED (90-260VAC)	Power supply featuring adjustable ouptut power and current display
PSU-OEM (5VDC)	DC power supply for system integration
TTL modulation	1-30 kHz
Analog modulation	1-30kHz, 0-5V
Fiber coupling	Multi mode/single mode fiber, SMA-905/FC connector




**LASER RADIATION**  
AVOID DIRECT EXPOSURE TO BEAM  
DO NOT STARE INTO BEAM  
NEVER VIEW THROUGH OPTICAL INSTRUMENTS



## RLTMDL laser head



141 x 73 x 46 mm<sup>3</sup>, 0.6 kg

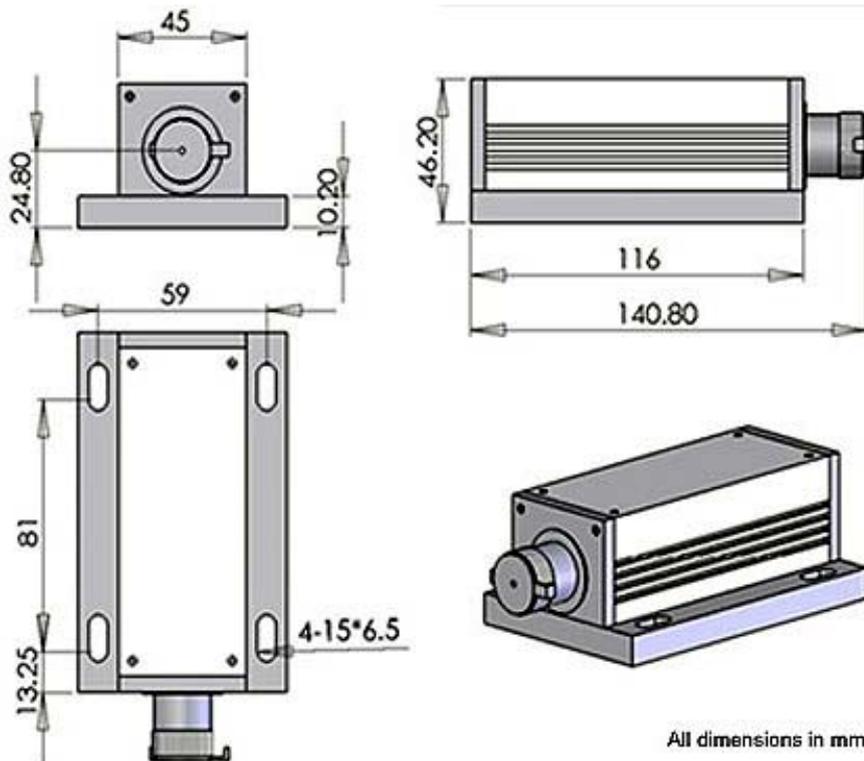




## PSU-LED power supply



154 x 155 x 95 mm<sup>3</sup>, 1.5 kg

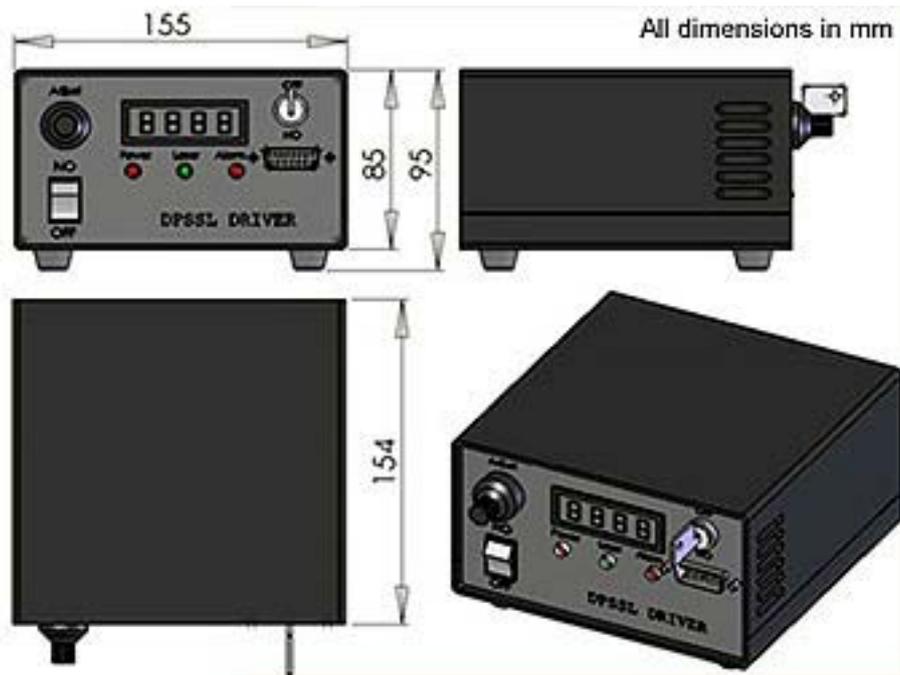




## PSU-FDA power supply




133 x 130 x 65 mm<sup>3</sup>, 1.2 kg

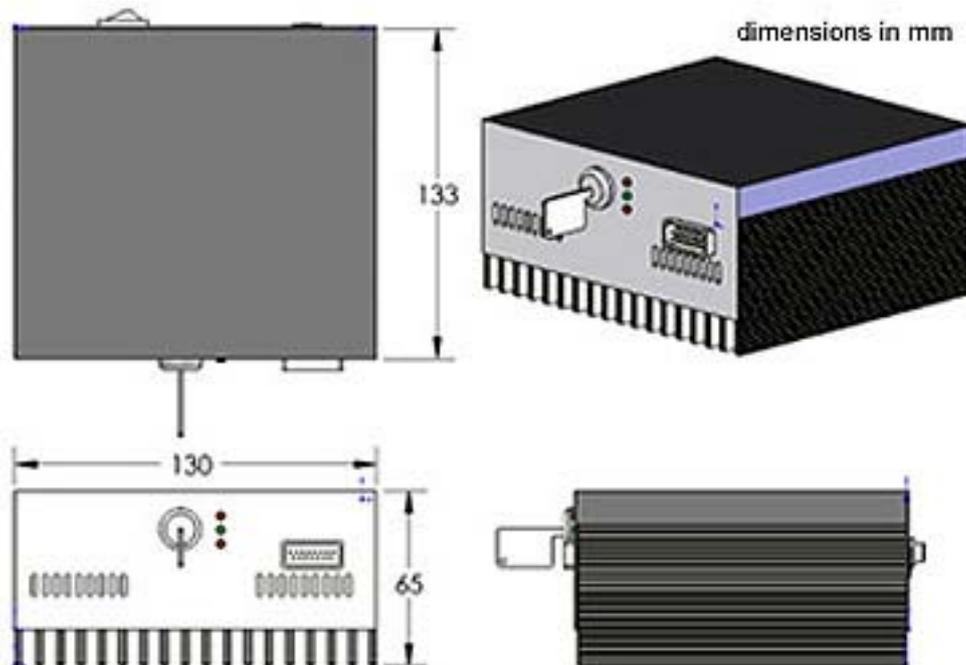



## PSU-OEM power supply

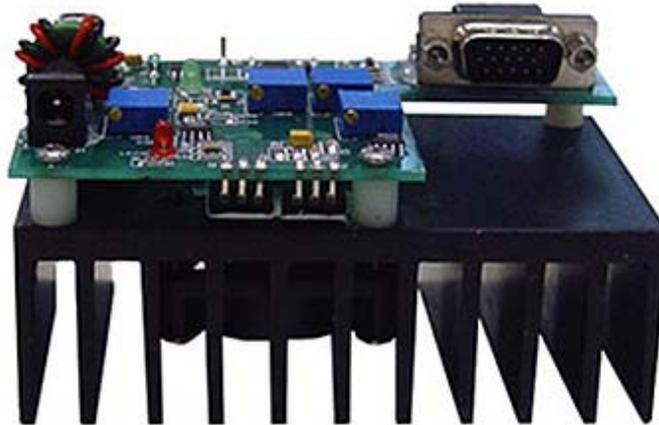

100 x 60 x 56 mm<sup>3</sup>, 0.2 kg

