



ROITHNER LASERTECHNIK GmbH

WIEDNER HAUPTSTRASSE 76
TEL. +43 1 586 52 43 -O. FAX. -44

1040 VIENNA
OFFICE@ROITHNER-LASER.COM

AUSTRIA



RLP-593

- Yellow DPSS Laser Pointer
- 593 nm, <1mW, or <5 mW
- IR Filter
- Safety Keylock
- Control LED, APC
- Transport case & Batteries incl.



Description


RLP-593 is a series of **diode pumped solid state (DPSS)** laser pointers emitting at **593 nm**, available with output powers of <1 mW and <5 mW. An **Automatic Power Control (APC)** circuit ensures excellent output power stability. **RLP-593** features a **control LED** and **IR filter** for safe operation, an integrated **safety keylock** to prevent unauthorized operation, and is run by **2 x 1.5V AAA alkaline batteries**. It comes in a polished chrome housing and black metal transport case

Laser pointer is only eligible for intermittent use

Specifications (T_{CASE} = 25°C)

Parameter	Values			Unit
	Min.	Typ.	Max.	
Wavelength		593		nm
Operating Temperature	15		30	°C
Operating Humidity (rel.)	40		70	%
Storage Temperature	-20		60	°C
Body Material	brass, polished chrome finish			
Lens Material	PMMA			
Weight (incl. batteries)	75			g
Power Source	2 x 1.5 V AAA alkaline batteries			

Outline and Components

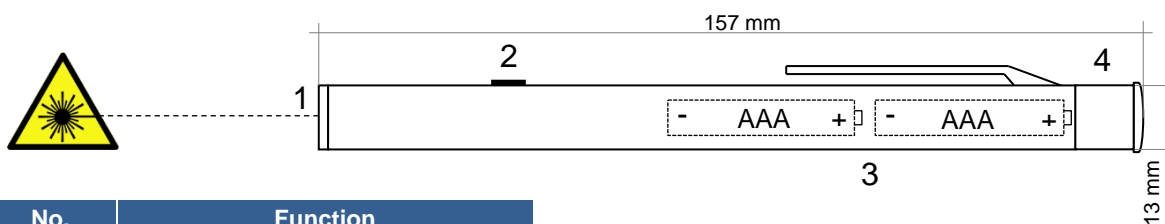

No.	Function
1	laser beam outlet
2	laser push button (ON/OFF)
3	battery compartment
4	cap with integrated keylock



Safety Instructions

- **This laser is intended for pointing out details on objects/blackboards during lecturing**
- **Laser radiation, direct and indirect can be dangerous to the naked eye**
 - Before operating the laser pointer make sure nobody is in or near the projection area
 - Do not look into the laser beam
 - Do not point the laser into the sky
 - Do not point the laser towards other humans or animals
 - Do not point the laser towards vehicles
 - Do not point the laser at mirrors or any reflective surfaces
- **Do not expose the laser pointer to high temperature, moisture, or vibration**
- **Do not give the laser pointer to unauthorized persons**
- **Do keep the laser pointer out of the reach of children**
- **Do not open the device. Maintenance must only be carried out by qualified personal**
- **This product is a class 3R laser device (EN 60825-1:2014)**



Insertion/Replacement/Disposal of Batteries

- Do only use brand new 1.5V AAA (micro) batteries of good quality
- Make sure batteries are inserted with correct polarity
- Batteries must not be recharged, short circuit or thrown into the fire
- Do not mix batteries of different charge state



As the end user, you are required by law, to return all flat batteries to your local waste collection place. Disposal of batteries in the household waste is prohibited

→ **Protect your environment**

Operation

Do never point the laser beam directly at persons/animals/vehicles



- The laser pointer is switched ON and OFF by means of a push button (2)
- If the push button (2) is pressed, the laser radiation emits through the laser outlet (1)
- If the push button (2) is released, the laser radiation is stopped

- **This laser pointer has been designed for intermittent use. If operated over 3 minutes continually, the temperature of the laser diode may exceed critical threshold, thereby negatively affecting the laser pointers performance and life time**



Disposal



Disposal of an unserviceable product has to be made in accordance with the relevant statutory regulations effective in your country