

ROITHNER LASERTECHNIK GIRDH

WIEDNER HAUPTSTRASSE 76 IO40 VIENNA AUSTRIA TEL. +43 I 586 52 43 -0, FAX. -44, OFFICE@ROITHNER-LASER.COM



SPL1310-5-9-PD

TECHNICAL DATA



Pigtailed Coaxial Laser Diode

Features

- 1310 nm
- SM Fiber
- Coaxial package
- Built-in PD

Applications

- Optical Bidi Module and Optical Receiver
- Optical Transmitter



Specifications (25°C)

Туре	Min.	Тур.	Max.	Unit
Optical Specification				
Output Power P _F	-	5	-	mW
Center Wavelength λ _C	1290	1310	1330	nm
Spectral Width Δλ	-	-	-	nm
Fiber Characteristics				
Fiber Core Size	-	9	-	μm
Fiber Length	-	0.8	1.0	m
Connector	FC	C/SC/ST/LC/N	1U	
Electrical Specification				
Slope Efficiency E _S	-	-	-	mW/mA
Threshold Current Ith	5	-	15	mA
Operation Current I _{op}	-	38	ı	mA
Operation Voltage V _f	-	-	1.6	V
Monitor Current I _m	0.1	-	ı	mA
PD Reverse Voltage	-	15	ı	V
PD Capacitance	-	10	15	pF
PD Dark Current	-	-	0.1	μΑ
Side Mode Suppression Ration	30	35	ı	dB
Data Rate		1.25		Gb/s
Package Style	Coaxial			
Absolute Maximum Ratings				
Reverse Voltage V _r	2.0		V	
Operating Temperature T _{Op}	-10 +50		°C	
Storage Temperature T _{stg}		-40 +85		°C
Lead Soldering Temperature (10 sec.)		260		°C

The above specifications are for reference purpose only and subjected to change without prior notice.



ROITHNER LASERTECHNIK GIRDH

WIEDNER HAUPTSTRASSE 76


1040 VIENNA TEL. +43 I 586 52 43 -0, FAX. -44, OFFICE@ROITHNER-LASER.COM



Electrical Connection

Pin Co	onfiguration - Type A	(standard)	Bottom View
LD	PIN 1 2 3 4	Function PD Anode LD Cathode LD Anode, GND PD Cathode	
Pin Co	nfiguration - Type B	(on request)	Bottom View
Pin Co	nfiguration - Type B	(on request) Function	Bottom View
10	♀³ PIN 1	Function LD Anode, PD Cathode	Bottom View
Pin Co	Q ³	Function	2

Package Dimensons (Unit: mm)

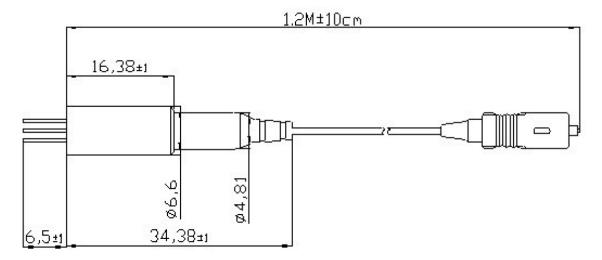

Safety of Laser light

Laser Light can damage the human eyes and skin. Do not expose the eye or skin directly to any laser light and/or through optical lens. When handling the LDs, wear appropriate safety glasses to prevent laser light, even any reflections from entering to the eye. Focused laser beam through optical instruments will increase the chance of eye hazard.



These LDs are emitting invisible light.



Cautions

1. Operating methode

- This LD shall change its forward voltage requirement and optical ouput power according to temperature change. Also, the LD will require more operation current to maintain same ouput power as it degrades. In order to maintain output power, use of APC (Automatic Power Control) is recommended. Which use monitor feedback to adjust the operation current.
- Confirm that electrical spike current generated by swithing on and off does not exceed the
 maximum operating current level specified herein above as absolute maximum rating. Also,
 employ appropriat countermeasures to reduce chattering and/or overshooting in the circuit.

2. Static Electricity

• Static electricity or electrical surges will reduce and degrade the reliability of the LDs. It is recommended to use a wrist trap or anti-electrostatic glove when handeling the product.

3. Absolute Maximum Rating

Active layer of LDs shall have high current density and generate high electric field during its
operation. In order to prevent excessive damage, the LD must be operated strictly below
absolute maximum rating.

