



## SPL1550-2-C9-PDI

- IR Pigtailed DFB Laser Diode
- 1550 nm, 2 mW
- 9 µm Single Mode Fiber
- Optical Isolator
- Integrated Photodiode



### Description

**SPL1550-2-C9-PDI** is an infrared pigtailed **DFB** laser diode, typically emitting at 1550 nm with an output power of 2 mW, and **integrated monitor photodiode**. It comes in a coaxial package with **9 µm single mode fiber** with FC/PC connector, and **built-in optical isolator**. Different connectors and fiber receptacle variants are optionally available.

### Maximum Rating

Parameter	Symbol	Min.	Values	Max.	Unit
Reverse Voltage	$V_R$			2.0	V
PD Reverse Voltage	$V_{RP}$			15	V
Operating Temperature	$T_{OPR}$	- 40		+ 85	°C
Storage Temperature	$T_{STG}$	- 40		+ 100	°C
Soldering Temperature (max. 3s)	$T_{SOL}$			+ 260	°C

### Electro-Optical Characteristics ( $T_{CASE} = 25^\circ\text{C}$ )

Parameter	Symbol	Min.	Values	Typ.	Max.	Unit
Peak Wavelength	$\lambda_P$	1540	1550	1560		nm
Output Power	$P_o$		2			mW
Spectral Width	$\Delta\lambda$		0.3	1		nm
Operating Voltage	$V_F$		1.4	1.7		V
Threshold Current	$I_{th}$		5	15		mA
Operating Current	$I_o$		30	35		mA
Side Mode Suppression Ratio			35			dB
PD Current	$I_M$	0.1				mA
PD Capacitance	$C_M$		10	20		pF
PD Dark Current	$I_{DM}$			0.1		µA
Optical Isolation			30			dB
Fiber Spec.	Type		Single Mode			
	Core diameter		9			µm
	Connector		FC/PC*			
	Length		80			cm




\*SC / SMA905 / fiber receptacle variant available on request



## Electrical Connection


Pin Configuration\*

Pin #	Function
Pin 1	PD Anode
Pin 2	LD Anode, Ground
Pin 3	LD Cathode
Pin 4	PD Cathode




\* subject to change

Bottom View



## Outline Dimension

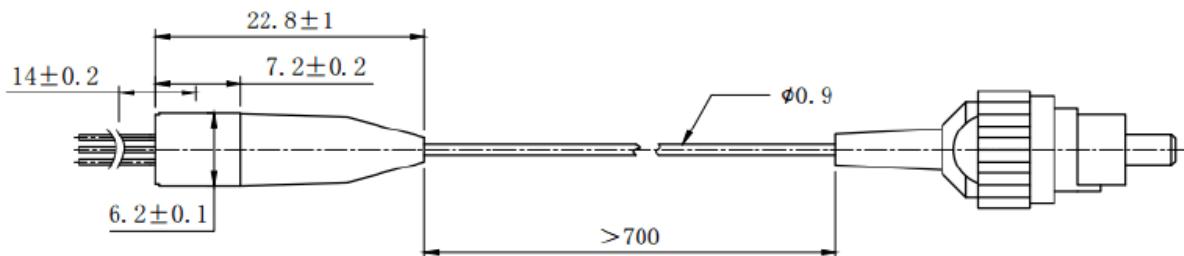

All dimensions in mm

## Precautions

### Safety

Laser light emitted from any laser diode may be harmful to the human eye. **Avoid looking directly into the laser diode's aperture.** The use of optical lenses will increase eye hazard



### ESD Caution

Always do handle laser diodes with care to **prevent electrostatic discharge**. We advise to **wearing wrist straps, and grounding all applicable work surfaces**, when handling laser diodes



### Operating Considerations

**Usage of current regulated drive circuits is mandatory** We advise to operate this laser diode with a current source and heat sink, and to never exceed the maximum specifications as outlined in this datasheet.